


MODULE TYPE B - 36 DOMES

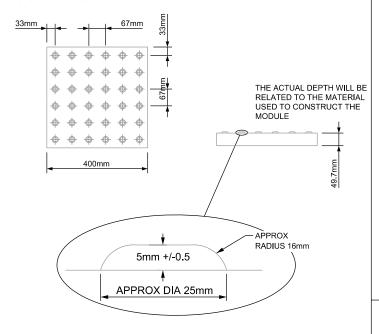

NOTES:

- 1. THE TACTILE DOMES ON THE TILES MUST BE LINED UP TO GIVE THE DIRECTION OF TRAVEL IN ORDER TO CROSS THE CARRIAGEWAY STRAIGHT
- 2. UTILITY CABINETS/CHAMBERS MUST NOT BE LOCATED WITHIN TACTILE PAVING AREA
- 3. REFER TO TACTILE PAVING GUIDANCE DOCUMENTATION
- 4. MODULE TYPE B (400 x 400mm) ONLY IS SHOWN HERE AND SHALL BE USED IN MOST CASES. OTHER SIZE MODULES MAY BE USED WHERE SITE SPECIFIC CIRCUMSTANCES DICTATE.
- 5. TACTILE BLISTER PAVING SHALL BE BEDDED ON 25mm MOIST SAND / CEMENT MORTAR (3:1), JOINTS FILLED WITH 4:1 MIX WITHIN 2mm OF THE PAVING SURFACE.

LEGEND:



TACTILE PAVIOUR: 400X400 BUFF FINISH (5mm JOINT).
TACTILE TO BE LAID SO BLISTER PATTERN IS IN LINE WITH CROSSING.



ACTIVITY

CC Construction & Commissioning

STANDARD CONSTRUCTION DETAILS (SCD)

TACTILE AND PAVING DETAILS AND RECOMMENDED
GRADIENTS AT UNCONTROLLED PEDESTRIAN CROSSING

PUBLICATION TITLE

 HISTORICAL REFERENCE
 DOCUMENTATION SET
 PUBLICATION DATE
 PUBLICATION NUMBER

 N/A
 STANDARDS
 JULY 2021
 CC | SCD | 05136